

Modular Potentiometers with Cermet (P11) or Conductive Plastic Elements (PA11)



FEATURES

- CECC 41300
- GAM T1
- P11 version for industrial and military applications
- PA11 version for professional audio applications
- Trimmer version T11/TA11 (see document No. 51021)
- Miniature module size: 12.5 mm square - low current compatibility
- Five shaft diameters and 12 terminal styles
- Multiple assemblies - up to seven modules
- Shaft and panel sealed version
- Up to twenty-one indent positions
- Switch modules
- Concentric shafts
- Motorized version
- Custom designs



VERSATILE	MODULAR	COMPACT	ROBUST
-----------	---------	---------	--------


ELECTRICAL SPECIFICATIONS			PA11	P11
Resistive Element			Conductive plastic	Cermet
Electrical Travel			270° ± 10°	270° ± 10°
Resistance Range*	Linear Law		1 kΩ to 1 MΩ	10 Ω to 10 MΩ
	Non Linear Law		470 Ω to 500 kΩ	100 Ω to 2.2 MΩ
Tolerance	Standard		± 20 %	± 20 %
	On request		-	± 5 % or ± 10 %
Power Rating	Linear Law		0.5 W at + 70 °C	1 W at + 70 °C
	Non linear Laws		0.25 W at + 70 °C	0.5 W at + 70 °C
	Multiple Assemblies		0.25 W at + 70 °C per module	0.5 W at + 70 °C per module
Temperature Coefficient (Typical)			± 500 ppm/°C	± 100 ppm/°C (R ≥ 100 Ω)
Limiting Element Voltage			350 V	350 V
Contact Resistance Variation	Linear Law		1 %	2 % or 3 Ω
End Resistance (Typical)			2 Ω	2 Ω
Independent Linearity (Typical)	Linear Law		± 5 %	± 5 %
Insulation Resistance			10 ⁶ MΩ min.	10 ⁶ MΩ min.
Dielectric Strength			1500 V _{RMS} min.	1500 V _{RMS} min.
Attenuation			90 dB max. and 0.05 dB min.	-
Mechanical Rotational Life			50 000 cycles	50 000 cycles

* Consult Vishay Sfernice for other ohmic values

MECHANICAL SPECIFICATIONS PA11 AND P11

Mechanical Travel:	300° ± 5°
Operating Torque, Single and Dual Assemblies:	
3 mm, 4 mm (1/8") dia. Shafts	0.5 to 1.3 Ncm max. (0.7 to 1.8 oz-inch max.)
6 mm (1/4") dia. Shafts	0.7 to 1.5 Ncm max. (1 to 2.1 oz-inch max.)
Three to Seven Modules (per module):	0.2 to 0.3 Ncm max. (0.3 to 0.45 oz-inch max.)
End Stop Torque:	
3 mm, 4 mm (1/8") dia. Shafts	25 Ncm max. (2.1 lb-inch max.)
6 mm (1/4") dia. Shafts	80 Ncm max. (6.8 lb-inch max.)
Tightening Torque:	
6 mm, 7 mm (1/4") dia. bushings	150 Ncm max. (13 lb-inch max.)
10 mm (3/8") dia. bushings	250 Ncm max. (21 lb-inch max.)
Weight	7 g to 9 g per module (0.25 to 0.32 oz)


VARIATION LAWS

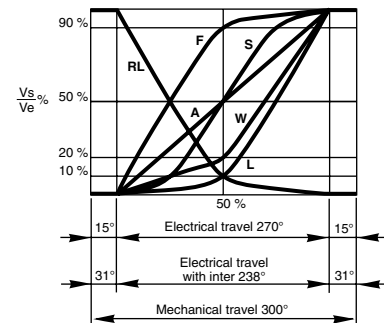




DIMENSIONS in millimeters [inches]

PCB PIN OUT A - A₁ - A₂/X - X₁ - X₂/Z - Z₁ - Z₂/W - W₁ - W₂

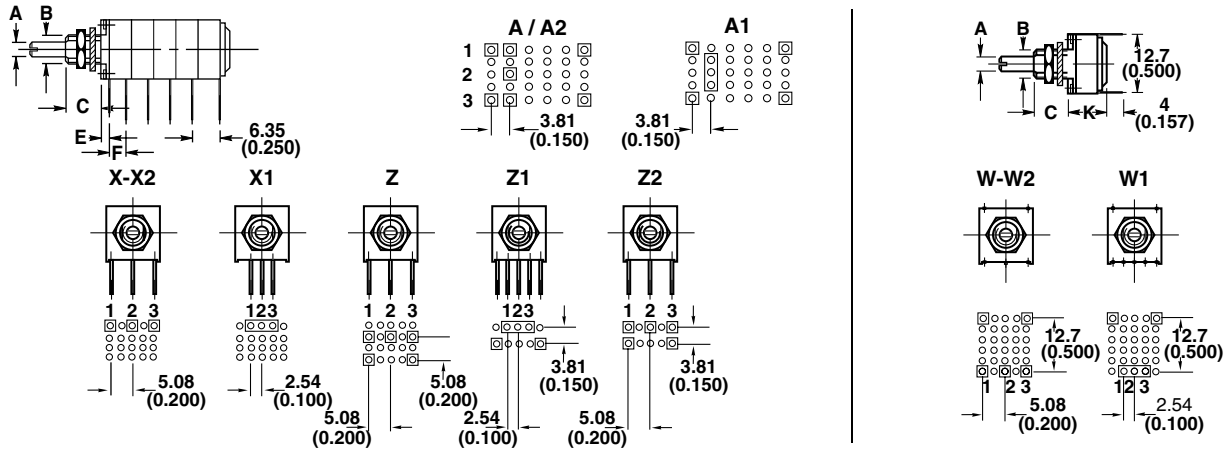


SOLDER LUGS Y

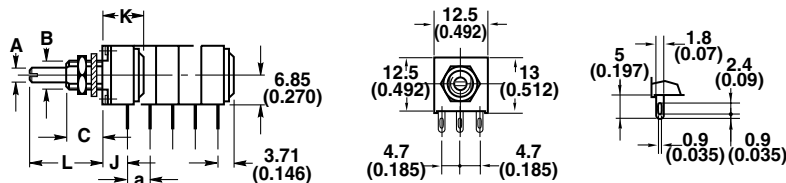


PANEL AND SHAFT SEALED TP/QP/VP/2P/7P


All models have to same bushing DIA 8 mm - L 8 mm




PANEL CUT OUT

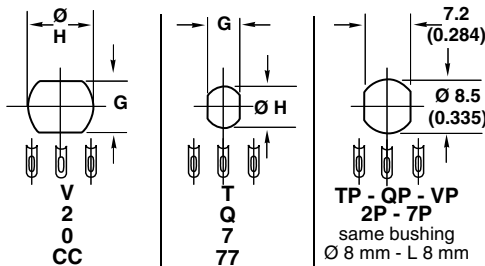

CIRCUIT DIAGRAM




CONCENTRIC SHAFT

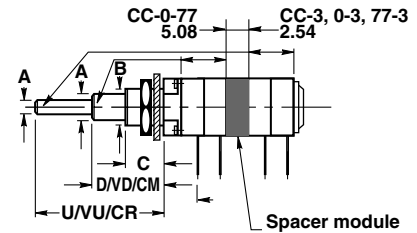


P11/PA11 71 P11/PA11 71H
P11/PA11 72 P11/PA11 72H with spindle baking nut

The position of each module is free

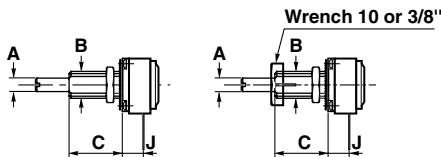

SWITCH: MOMENTARY PUSH OR PUSH-PUSH

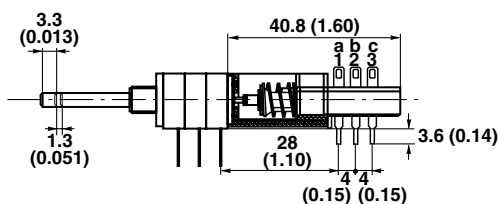

Shafts	T	Q	V	CC	7	71	72	2	0	77		
	dimensions mm ± 0.5					dimensions inches ± (0.01)						
A Shafts Ø	3	4	6	3/6	1/8"	1/8"	1/8"	1/4"	1/8"	1/4"	0.07	1/8"
B Bushing Ø	6	7	10	10	1/4"	1/4"	1/4"	3/8"	3/8"	1/4"		
C L	8	8	9.5	9.5	1/4"	3/8"	1/2"	3/8"	3/8"	1/4"		
J version Y, X, X ₁ , X ₂	5	5	7	7	0.200	0.200	0.200	0.278	0.278	0.200		
K	9.1	9.1	11.1	-	0.357	0.357	0.357	0.436	-	-		
E version Z	1.8	1.8	3.8	3.8	0.071	0.071	0.071	0.150	0.150	0.071		
E version	1.6	1.6	3.6	3.6	0.063	0.063	0.063	0.14	0.14	0.063		
F	version Z : 5.08 (0.200)				versions A- A ₁ -A ₂ -Z ₁ -Z ₂ : 3.81 (0.150)							
G Panel	5.2	6.2	8.2	8.2	0.197	0.197	0.197	0.323	.323	0.197		
H Cutout Ø	6.5	7.5	10.5	10.5	0.268	0.268	0.268	0.394	0.394	0.268		
a	variable	5.08 (0.200)			7.62 (0.300)			10.16 (0.400)				
Thread	M 0.75				32 threads/inch							
Nut	8	10	12	12	0.313	0.313	0.313	0.500	0.500	0.313		
Shaft lengths L	Measurement from the mounting face, see ordering procedures											

P11, PA11



Vishay Sfernice


Modular Potentiometers with Cermet (P11) or
Conductive Plastic Elements (PA11)

ENVIRONMENTAL SPECIFICATIONS

	PA11	P11
Operating Temperature Range	- 55 °C + 125 °C	- 55 °C + 125 °C
Climatic Category	55/125/21	55/125/56
Sealing	IP64	IP64
Storage Temperature	- 55 °C + 125 °C	- 55 °C + 150 °C

STANDARD RESISTANCE ELEMENT DATA											
STANDARD RESISTANCE VALUES	P11 CERMET						PA11 CONDUCTIVE PLASTIC LINEAR LAW			TCR	
	LINEAR LAW			NON LINEAR LAW			MAX. POWER AT 70 °C	MAX. WORKING VOLTAGE	MAX. CUR. THROUGH WIPER	- 55 °C	+ 125 °C
	MAX. POWER AT 70 °C	MAX. WORKING VOLTAGE	MAX. CUR. THROUGH WIPER	MAX. POWER AT 70 °C	MAX. WORKING VOLTAGE	MAX. CUR. THROUGH WIPER				P11	PA11
Ω	W	V	mA	W	V	mA	W	V	mA	ppm/°C	
22 47	1	4.69 6.85	213.2 145.8							± 200	
100 200 470 1K 2.2K 4.7K 10K 22K 47K 100K 220K 470K 1M 2.2M 4.7M	↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓	10 14.8 21.6 31.6 46.9 63.5 100 148.3 216.7 316.2 350 350 350 350 350	100 67.4 46.1 31.6 21.3 14.5 10 6.7 4.6 3.16 1.59 0.75 0.35 0.16 0.07	0.5 ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓	15.3 22.4 33.2 48.5 79.7 105 153 224 332 350 350	32.7 22.4 15.1 10.3 7.07 4.77 3.26 2.24 1.51 0.74 0.35	0.5 ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓	22.4 33.2 48.5 79.7 105 153 224 332 350	22.4 15.1 10.3 7.07 4.77 3.26 2.24 1.51 0.74	± 100	± 1000

POWER RATING CHART

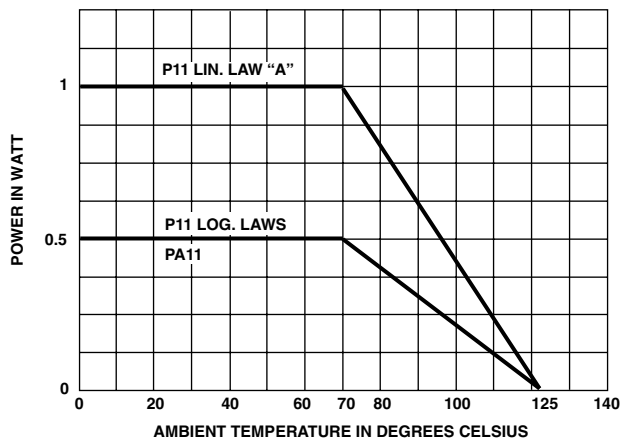

MULTIPLE ASSEMBLIES

Standard assemblies can comprise up to 7 modules in addition to the shaft and bushing module.

Detents module (CV)


Switch modules (RS or RSI)

Potentiometer modules

Spacer module (EV) to increase the distance between rows of pins from 5.06 mm (0.200) to 10.16 mm (0.400).

Screening module, with ground terminal.

The position of each module is free except the push/push, momentary push and motor which has to be the last module.

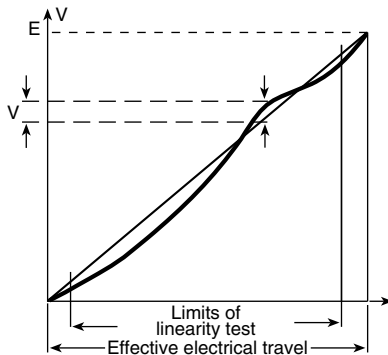LINEARITY - CONFORMITY


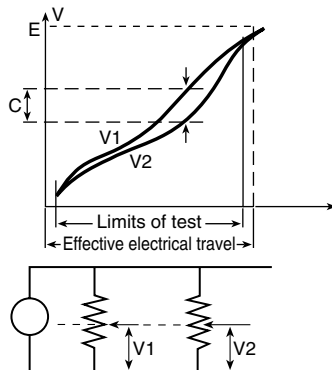
The independent linearity (conformity for the non linear laws) is the maximum gap ΔV between the actual variation curve and the theoretical variation curve the nearest to it. The linearity and the conformity are expressed in percentage of the total applied voltage E

$$\text{linearity conformity} = \frac{\pm \Delta V \text{ max}}{E}$$

They are measured over 90 % of actual electrical travel (centered).

On request linearity can be guaranteed in linear law.

For example: linearity $\pm 2\%$ + J 145 option (see ordering procedure).

INTERLINEARITY - INTERCONFORMITY


It is the maximum deviation between the actual voltage outputs of 2 or more pot modules in the same assembly. It is expressed as a percentage of the total applied voltage, or preferably in dB attenuation.

Interlinearity is measured between 2 pot modules, over 10 to 90 % of the attenuation.

The interlinearity or interconformity is expressed as a percentage of the total applied voltage :

$$I\% = \frac{|C|}{E}$$

Or in decibels by comparison between outputs V_1 and V_2

$$I \text{ dB} = 20 \log \frac{V_1}{V_2}$$

PERFORMANCE				
TESTS	CONDITIONS	TYPICAL VALUES AND DRIFTS		
			P11 CERMET	PA11 CONDUCTIVE PLASTIC
Load Life	1000 h at + 70 °C (90'/30')	total resistance shift	$\pm 2\%$	$\pm 10\%$
		contact resistance variation	$\pm 4\%$	$\pm 5\%$
Temperature Cycle	5 cycles - 55 °C to 125 °C	total resistance shift	$\pm 0.2\%$	$\pm 0.5\%$ typical
Moisture	+ 40 °C 93 % relative humidity	total resistance shift insulation resistance	56 days $\pm 2\%$ > 1000 M Ω	21 days $\pm 5\%$ > 10 M Ω
Rotational Life	P11/PA11: 50 000 cycles	total resistance shift contact resistance variation	$\pm 5\%$ $\pm 5\%$	$\pm 6\%$ $\pm 2\%$
Climatic Sequence	Dry heat at + 125 °C/Damp heat Cold - 55 °C/Damp Heat 5 cycles	total resistance shift	$\pm 1\%$	-
Shock	50 G 11 ms 3 shocks - 3 directions	total resistance shift resistance setting change	$\pm 0.2\%$ $\pm 0.5\%$	$\pm 0.2\%$ $\pm 0.5\%$ typical
Vibration	10 - 55 Hz 0.75 mm or 10 G 6 hours	total resistance shift voltage setting change	$\pm 0.2\%$ $\pm 0.5\%$ typical	$\pm 0.2\%$ $\pm 0.5\%$ typical

OPTIONS MODULES : RS ON/OFF SWITCH RSI CHANGEOVER SWITCH

The position of each module is free.

RS and RSI rotary switches are housed in a standard P11 module size 12.7 x 12.7 x 5.08 mm (0.5" x 0.5" x 0.2"). They have the same terminal styles as the assembled electrical modules.

CAUTION: Because of the switch actuation travel, the potentiometer total electrical travel is reduced to $240^\circ \pm 10^\circ$

Switch actuation is described as seen from the shaft end. D: means actuation in maximum CCW position
F: means actuation in maximum CW position
The switch actuation travel is 25° with a total mechanical travel of $300^\circ \pm 5^\circ$.

MODULES : PUSH/PUSH SWITCH RSPP MOMENTARY/PUSH SWITCH RSMP

The switches are manufactured by ITT, F.U. series (NE18 series available on request).

They have to be the last element of potentiometer and are linked to electrical module by an interface.

RSPP and RSMP switches are available only with P11/PA11 T-Q or 7 series not with P11/PA11 V or 2 series.

Options :

2 reversing switches F2 4 reversing switches F4
6 reversing switches F6 8 reversing switches F8
Available with shafts R (T), G (Q), CR (7) others shafts on request.

Not available with panel sealed option.


Number of modules before the switch limited to 3 modules.

VALLEY DETENTS

The valley detents mechanism is housed in a standard P11 module. Up to 21 detents position available.

Count detents as follows : 1 for CCW position, 1 for full CW position, plus the other positions forming **equal resistance increments** (linear taper) - **not equal angles**.

Available now : CVID - CVIF - CVIM
CV3 - CV11 - CV21

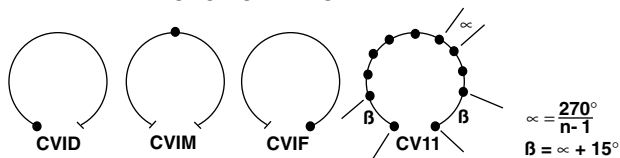

SWITCH MODULES

RSD SINGLE POLE SWITCH, NORMALLY OPEN

In full CCW position, the contact between 1 and 3 is open. It is made at the beginning of the travel in CW direction.

RSF SINGLE POLE SWITCH, NORMALLY OPEN

In full CW position, the contact between 1 and 3 is open. It is made at the beginning of the travel in CCW direction.

RSID SINGLE POLE CHANGEOVER

In full CCW position, the contact is made between 3 and 2 and open between 3 and 1. Switch actuation (CW direction) reverses these positions.

RSIF SINGLE POLE CHANGEOVER

In full CW position, the contact is made between 1 and 2 and open between 1 and 3. Switch actuation (CCW direction) reverses these positions.

RSPP F2 : PUSH/PUSH SWITCH WITH TWO REVERSING SWITCHES

Idle position : the contact is made between 1 and 2 and a and b. It is open between 2 and 3 and b and c.


Pushed position: the contact is made between 2 and 3 and b and c. It is open between 1 and 2 and a and b.

Not available on P11V and P11-2.

On request for P11Q and P11-7.

SWITCH SPECIFICATIONS		
MODEL	RS - RSI	F2 to F8
Switching Power max.	62.5 VA \cup 15 VA =	50 VA \cup
Switching Current max.	0.25 A 250 V \cup 0.5 A 30 V =	0.5 A \cup
Max. Current Through Element	2 A	2 A
Contact Resistance	30 m Ω	100 m Ω
Dielectric Strength	Terminal to Terminal	1000 V _{RMS}
	Terminal to Bushing	2000 V _{RMS}
Max. Voltage Operation	250 V \cup 30 V =	250 V \cup
Insulation Resistance Between Contacts	10 ⁶ M Ω	10 ³ M Ω
Life at P max.	10 000 actuations	100 000 actuations
Minimal Travel	25 $^\circ$	3.3 mm to 4.7 mm
Operating Temperature	- 40 $^\circ$ C to + 85 $^\circ$ C	- 20 $^\circ$ C + 70 $^\circ$ C


ELECTRICAL DIAGRAM

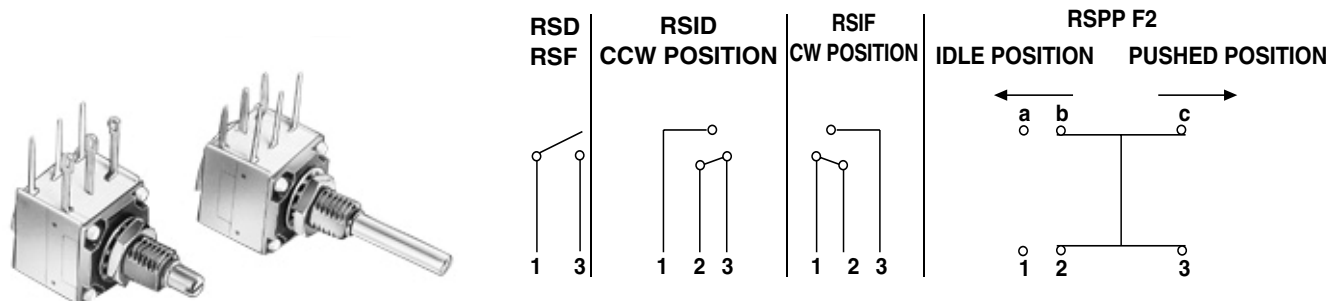

CENTER TAP "J"

The extra terminal is a solder lug connected at 50 % of electrical travel and situated in the potentiometer module opposite the terminals.

Center tap short circuit 11° of travel.

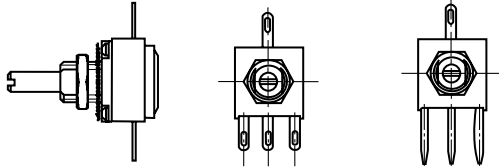

SHAFTS (see Ordering Information)

The shaft lengths are always measured from the mounting face.

Standard shafts are designed by a letter code (one or two digits). Shafts slots are aligned to ± 10° of the wiper position.

CONCENTRIC SHAFTS

The CC or 0 or 77 concentric shaft versions allies the total flexibility of the P11/PA11 modular system to the advantage of having two separate shafts.

The outer 6 mm or 1/4" or 1/8" dia. shaft drives the modules situated immediately behind the panel, before the spacer module.

The inner 3 mm or 1/8" or 0.07" dia. shaft drives the modules situated after the spacer module.

Spacer is available with a choice of two spacer thickness :


5.08 mm designations: CC, 0, 77

2.54 mm designations: CC-3, 0-3, and 77-3. See dimensional drawings on second page of this data sheet

CUSTOM SHAFTS

When special shafts are required - flat, threaded ends, special shaft lengths, etc. a drawing is required.

SPLINED SHAFT "I"

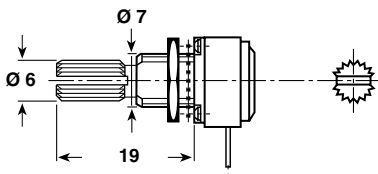

FLATTED SHAFT

PA11/P11 - 2 = VHM

PA11/P11 - 7 = CDM

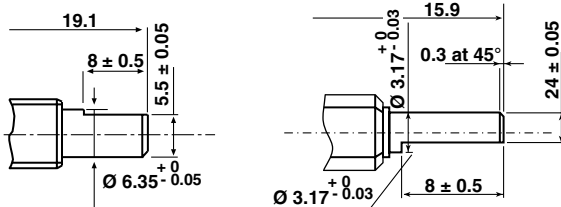


Fig. 9

NEUTRAL MODULE "EN"

Neutral or screen module is housed in a standard P11 module. It is used as a screen between two electrical modules.


The leads can be connected to ground.

LOCATING PEGS (Anti-rotation lugs)

The locating peg is provided by a plate mounted on the bushing and positioned by the module sides.

Four set positions are available, clock face orientation: 12, 3, 6, 9.

All P11 bushings have a double flat. When panel mounting holes have been punched accordingly, an anti-rotation lug is not necessary.

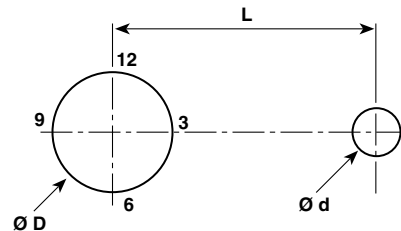

CODE	P11 - PA11					EFFECTIVE HIGH PEG
	VERSION	T-7	V-CC	Q	2-0	
B24	ø D mm	6.5	10.5	7.5	10	0.7
	ø d mm	2	2	2	2	
	L mm	6.2	6.2	6.2	6.2	
B30	ø d mm	2	2	2	2	0.7
	L mm	7.75	7.75	7.75	7.75	
B53	ø d mm	-	3.5	-	3.5	1.1
	L mm	-	13.5	-	13.5	

TRIMMERS T11

See data sheet document No. 51021

MARKING

POTENTIOMETER MODULE

VISHAY logo, nominal ohmic value (Ω, kΩ, MΩ), two stars identify PA11 version, tolerance in % - variation law, manufacturing date (four digits), "3" for the lead 3.

SWITCH MODULE

Version, manufacturing date (four digits), "c" for common lead.

INDENT MODULE

Version, manufacturing date (four digits).

P11, PA11

Vishay Sfernice

Modular Potentiometers with Cermet (P11) or Conductive Plastic Elements (PA11)



ORDERING INFORMATION

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">P11 Cermet element</td> <td style="width: 50%;">PA11 Conductive plastic element</td> </tr> <tr> <td colspan="2" style="text-align: center;">SERIES</td> </tr> </table>	P11 Cermet element	PA11 Conductive plastic element	SERIES		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;">Y</td> <td>Solder lugs - radial 4.70 mm (.200") pin spacing</td> </tr> <tr> <td>X</td> <td>PCB pins - radial</td> </tr> <tr> <td>Z</td> <td>PCB pins - radial with front support plate</td> </tr> <tr> <td>A</td> <td>PCB pins - radial with front and back support plates</td> </tr> <tr> <td>W</td> <td>PCB pins - axial with 2 extra pins - 1 module only</td> </tr> <tr> <td>-</td> <td>5.08 mm (.200") pin spacing for X, Z, W pins section 0.9 x 0.3 mm² (.035" x .012")</td> </tr> <tr> <td>1</td> <td>2.54 mm (.100") pin spacing for X, Z, W pins section 0.6 x 0.3 mm² (.024" x .012")</td> </tr> <tr> <td>2</td> <td>for X, Z, W pins section 0.6 x 0.3 mm² (.024" x .012")</td> </tr> <tr> <td>-</td> <td>5.08 mm (.200") space between modules</td> </tr> <tr> <td>3</td> <td>7.62 mm (.300") space between modules</td> </tr> <tr> <td>4</td> <td>10.16 mm (.400") space between modules</td> </tr> <tr> <td colspan="2" style="text-align: center;">TERMINAL STYLES</td> </tr> </table>	Y	Solder lugs - radial 4.70 mm (.200") pin spacing	X	PCB pins - radial	Z	PCB pins - radial with front support plate	A	PCB pins - radial with front and back support plates	W	PCB pins - axial with 2 extra pins - 1 module only	-	5.08 mm (.200") pin spacing for X, Z, W pins section 0.9 x 0.3 mm ² (.035" x .012")	1	2.54 mm (.100") pin spacing for X, Z, W pins section 0.6 x 0.3 mm ² (.024" x .012")	2	for X, Z, W pins section 0.6 x 0.3 mm ² (.024" x .012")	-	5.08 mm (.200") space between modules	3	7.62 mm (.300") space between modules	4	10.16 mm (.400") space between modules	TERMINAL STYLES		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;">B24</td> <td>Distance from shaft center of 6.2 mm (.244") for all models. Plate thickness of 0.4 mm (.015").</td> </tr> <tr> <td>B30</td> <td>Distance from shaft center of 7.75 mm (.305") for all models. Plate thickness of 0.4 mm (.015").</td> </tr> <tr> <td>B53</td> <td>Distance from shaft center of 13.5 mm (.531") for V, 2, CC and O models. Plate thickness of 0.8 mm (.031").</td> </tr> <tr> <td colspan="2">Locating pegs can be placed at 12, 3, 6 or 9 o'clocks. Not available with panel and shaft sealing option P.</td> </tr> <tr> <td colspan="2" style="text-align: center;">LOCATING PEGS</td> </tr> </table>	B24	Distance from shaft center of 6.2 mm (.244") for all models. Plate thickness of 0.4 mm (.015").	B30	Distance from shaft center of 7.75 mm (.305") for all models. Plate thickness of 0.4 mm (.015").	B53	Distance from shaft center of 13.5 mm (.531") for V, 2, CC and O models. Plate thickness of 0.8 mm (.031").	Locating pegs can be placed at 12, 3, 6 or 9 o'clocks. Not available with panel and shaft sealing option P.		LOCATING PEGS		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="6" style="text-align: center;">FROM MOUNTING FACE</td> </tr> <tr> <td style="width: 5%;">T</td> <td style="width: 5%;">K M R</td> <td style="width: 5%;">Dia. 3 3</td> <td style="width: 5%;">Length 9.5 12.5 22</td> <td style="width: 5%;">End Flat }</td> <td style="width: 5%;">End Shaft slotted</td> </tr> <tr> <td>Q</td> <td>E F G I</td> <td>4 4 4 6</td> <td>9.5 12.5 22 19</td> <td>} }</td> <td>slotted }</td> </tr> <tr> <td>V</td> <td>N D S</td> <td>6 6 6</td> <td>16 25 50</td> <td>} }</td> <td>slotted }</td> </tr> <tr> <td colspan="2">AP</td> <td colspan="4">Custom - specify or quote drawing.</td> </tr> <tr> <td>7</td> <td>CDM CK</td> <td>1/8" 1/8"</td> <td>5/8" 3/8"</td> <td>} }</td> <td>slotted</td> </tr> <tr> <td>7 71 72</td> <td>CM CD CH CR</td> <td>1/8" 1/8" 1/8" 1/8"</td> <td>1/2" 5/8" 3/4" 7/8"</td> <td>} }</td> <td>slotted</td> </tr> <tr> <td>2</td> <td>VD VR VN VL VHM</td> <td>1/4" 1/4" 1/4" 1/4" 1/4"</td> <td>5/8" 7/8" 1" 1.1/2" 3/4"</td> <td>} }</td> <td>slotted flat</td> </tr> <tr> <td>CC CC-3</td> <td>D U</td> <td>6 3</td> <td>16 28.5</td> <td>} }</td> <td>plain</td> </tr> <tr> <td>77 77-3</td> <td>CM CR</td> <td>1/8" 0.07"</td> <td>1/2" 0.874"</td> <td>} }</td> <td>plain</td> </tr> <tr> <td>0 0-3</td> <td>VD VU</td> <td>1/4" 1/8"</td> <td>5/8" 9/8"</td> <td>} }</td> <td>plain</td> </tr> <tr> <td colspan="6" style="text-align: center;">STANDARDS SHAFT LENGTHS</td> </tr> </table>	FROM MOUNTING FACE						T	K M R	Dia. 3 3	Length 9.5 12.5 22	End Flat }	End Shaft slotted	Q	E F G I	4 4 4 6	9.5 12.5 22 19	} }	slotted }	V	N D S	6 6 6	16 25 50	} }	slotted }	AP		Custom - specify or quote drawing.				7	CDM CK	1/8" 1/8"	5/8" 3/8"	} }	slotted	7 71 72	CM CD CH CR	1/8" 1/8" 1/8" 1/8"	1/2" 5/8" 3/4" 7/8"	} }	slotted	2	VD VR VN VL VHM	1/4" 1/4" 1/4" 1/4" 1/4"	5/8" 7/8" 1" 1.1/2" 3/4"	} }	slotted flat	CC CC-3	D U	6 3	16 28.5	} }	plain	77 77-3	CM CR	1/8" 0.07"	1/2" 0.874"	} }	plain	0 0-3	VD VU	1/4" 1/8"	5/8" 9/8"	} }	plain	STANDARDS SHAFT LENGTHS					
P11 Cermet element	PA11 Conductive plastic element																																																																																																																
SERIES																																																																																																																	
Y	Solder lugs - radial 4.70 mm (.200") pin spacing																																																																																																																
X	PCB pins - radial																																																																																																																
Z	PCB pins - radial with front support plate																																																																																																																
A	PCB pins - radial with front and back support plates																																																																																																																
W	PCB pins - axial with 2 extra pins - 1 module only																																																																																																																
-	5.08 mm (.200") pin spacing for X, Z, W pins section 0.9 x 0.3 mm ² (.035" x .012")																																																																																																																
1	2.54 mm (.100") pin spacing for X, Z, W pins section 0.6 x 0.3 mm ² (.024" x .012")																																																																																																																
2	for X, Z, W pins section 0.6 x 0.3 mm ² (.024" x .012")																																																																																																																
-	5.08 mm (.200") space between modules																																																																																																																
3	7.62 mm (.300") space between modules																																																																																																																
4	10.16 mm (.400") space between modules																																																																																																																
TERMINAL STYLES																																																																																																																	
B24	Distance from shaft center of 6.2 mm (.244") for all models. Plate thickness of 0.4 mm (.015").																																																																																																																
B30	Distance from shaft center of 7.75 mm (.305") for all models. Plate thickness of 0.4 mm (.015").																																																																																																																
B53	Distance from shaft center of 13.5 mm (.531") for V, 2, CC and O models. Plate thickness of 0.8 mm (.031").																																																																																																																
Locating pegs can be placed at 12, 3, 6 or 9 o'clocks. Not available with panel and shaft sealing option P.																																																																																																																	
LOCATING PEGS																																																																																																																	
FROM MOUNTING FACE																																																																																																																	
T	K M R	Dia. 3 3	Length 9.5 12.5 22	End Flat }	End Shaft slotted																																																																																																												
Q	E F G I	4 4 4 6	9.5 12.5 22 19	} }	slotted }																																																																																																												
V	N D S	6 6 6	16 25 50	} }	slotted }																																																																																																												
AP		Custom - specify or quote drawing.																																																																																																															
7	CDM CK	1/8" 1/8"	5/8" 3/8"	} }	slotted																																																																																																												
7 71 72	CM CD CH CR	1/8" 1/8" 1/8" 1/8"	1/2" 5/8" 3/4" 7/8"	} }	slotted																																																																																																												
2	VD VR VN VL VHM	1/4" 1/4" 1/4" 1/4" 1/4"	5/8" 7/8" 1" 1.1/2" 3/4"	} }	slotted flat																																																																																																												
CC CC-3	D U	6 3	16 28.5	} }	plain																																																																																																												
77 77-3	CM CR	1/8" 0.07"	1/2" 0.874"	} }	plain																																																																																																												
0 0-3	VD VU	1/4" 1/8"	5/8" 9/8"	} }	plain																																																																																																												
STANDARDS SHAFT LENGTHS																																																																																																																	

SINGLE SHAFT

BUSHING				SHAFT DIA.
DIA.	LENGTH			
T	6	8		3
Q	7	8		4
V	10	9.5		6
2	3/8"	3/8"		1/4"
7	1/4"	1/4"		1/8"
71	1/4"	3/8"		1/8"
72	1/4"	1/2"		1/8"

CONCENTRIC SHAFT

CC	10	9.5	3 - 6
O	3/8"	3/8"	1/8" - 1/4"
77	1/4"	1/4"	0.07" - 1/8"

*All panel sealing versions have a bushing of 8 mm dia. and 8 mm length

SHAFT AND BUSHING

SHAFT AND BUSHING MODULE

PA11 7 X13 or B24 P

OPTION INDENTS MODULE SWITCH MODULE 1st POTENTIOMETER MODULE 2nd POTENTIOMETER MODULE 3rd POTENTIOMETER MODULE

CR CV1M RSD 100 k 20 % A J84 10 k 20 % A J + J84 100 k

THE POSITION OF EACH MODULE IS FREE

SHAFT AND BUSHING MODULE

PA11 7 X13 or B24 P

OPTION INDENTS MODULE SWITCH MODULE 1st POTENTIOMETER MODULE 2nd POTENTIOMETER MODULE 3rd POTENTIOMETER MODULE

CR CV1M RSD 100 k 20 % A J84 10 k 20 % A J + J84 100 k

OPTION INDENT MODULE

CV1M	1 indent at half travel
CV1D	1 indent CCW position
CV1F	1 indent CW position
CV3	3 indents inc. CW & CCW
-	-
-	-
-	-
CV11	11 indents
-	-
-	-
-	-
CV21	21 indents etc.

Former CRN version (N-1 equal mechanical angles) available on request.

OPTION SWITCH MODULE

RSD	Single pole open switch in CCW position - 2 pins
RSF	Single pole open switch in CW position - 2 pins
RSID	Single pole chargeover switch in CCW position - 3 pins
RSIF	Single pole chargeover switch in CW position - 3 pins

An assembly can comprise 1 or more switch modules. Pin out RS and RSI is the print out as other assembled modules.

OHMIC VALUE

Quote clearly multipliers K - M

10 Ω to 10 MΩ
A linear law - cermet

100 Ω to 2.2 MΩ
L, F, S non linear laws - cermet

Conductive plastic
1 kΩ to 1MΩ A linear law

470 Ω to 500 kΩ
non-linear laws

VARIATION LAW

A	Linear
L	CW log 10 %
F	CW reverse log
S	Audio S shape symmetrical log
W	CW log 20%
RL	CCW log

TOLERANCE


± 20 %	Standard
± 10 %	Optional
± 5 %	Optional (cermet only)

OPTIONS

J	Center tap
J41	Panel sealed bushing 10 mm dia.
J44	Interlinearity ± 2 % (linear law)
J84	Accuracy of center point of CV1M to ± 2 % (except S law)
J123	Linearity ± 3 % (linear law)
J145	Linearity ± 2 % (linear law)
J152	Marking part number
EN	Empty module with screen
EV	Spacer module without pin
M	Motorized assembly
RSPP	Push Push switch
RSMP	Momentary Push switch
Servo	Electrical travel 300°



SAP PART NUMBERING GUIDELINES

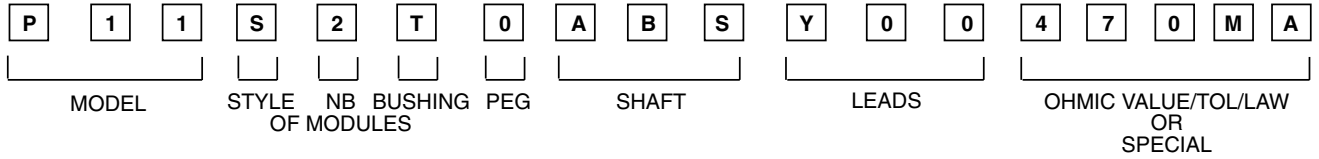

See the end of this data book for conversion tables



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.