


# PIN HEADER 2.54mm (0.100")

**Specifications:**


Contact Resistance: 30mΩmax.at DC 100mA  
 Insulator Resistance: 1000MΩmin.at DC 500V  
 Current Rating: 1 AMP

**Dielectric Withstanding**

Voltage: AC 500V For 1 minute  
 Operating Temperature: -55°C ~ +105°C  
 Contact: Brass  
 Housing: PBT & 30% Glass Fiber (UL 94V-O)

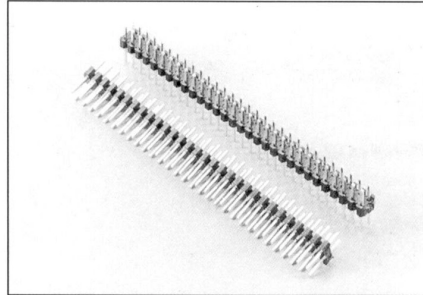

**Dual Row**

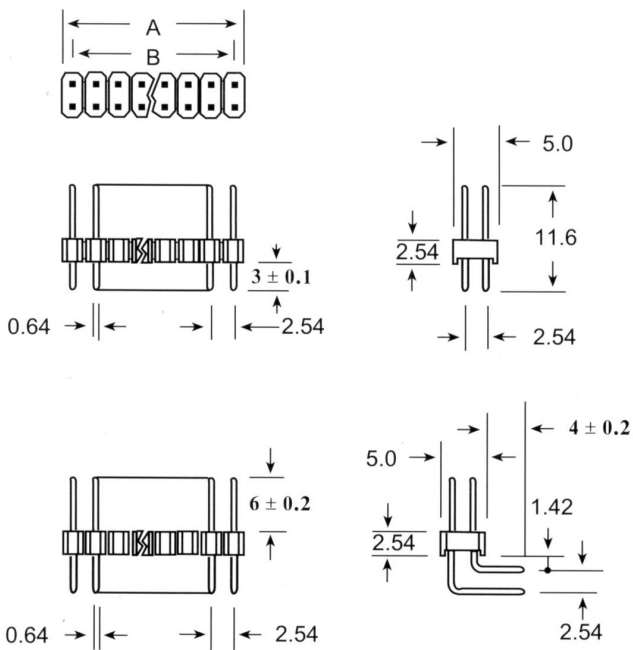

Position	2 Thru 40
Dimension	4 Thru 80
A	2.54*Position No.
B	2.54*Position No.-2.54